



Vitrimerization of poly(butylene succinate) by reactive melt mixing using Zn(II) epoxy-vitrimer chemistry

Christos Panagiotopoulos, Dimitrios Korres and Stamatina Vouyiouka *

Laboratory of Polymer Technology, School of Chemical Engineering, National Technical University of Athens, Zographou Campus, 157 80 Athens, Greece (* mvuyiuka@central.ntua.gr)

Abstract

Vitrimers constitute a new class of covalent adaptable networks (CANs), in which thermally stimulated associative exchange reactions allow the topological rearrangement of the dynamic network while keeping the number of the bonds and crosslink density constant. In the last years, vitrimers have attracted a great deal of attention due to the combination of **reprocessability** and **improved properties** thanks to the development of a dense crosslinked — yet malleable — structure.


The current study proposed a **solvent-free method** to synthesize vitrimers by a **two-step melt process** using a commercial **biobased and biodegradable polyester, poly(butylene succinate), PBS**. By tuning the crosslinker content (0 – 10 mol % with respect to PBS repeating unit) and thus the Zinc(II) catalyst to crosslinker ratio (0 to 1), tailor-made vitrimers were prepared with high insolubility. PBS vitrimers could still be reprocessed by compression molding after the crosslinking, which enables recycling process.

Methodology


Starting materials

- Commercial extrusion grade PBS
- Diglycidyl ether of bisphenol A, DGEBA (SIGMA Life Science)
- Zn(acac)₂·2H₂O, Zinc catalyst (Sigma-Aldrich)
- Commercial primary and secondary antioxidants

Melt mixing

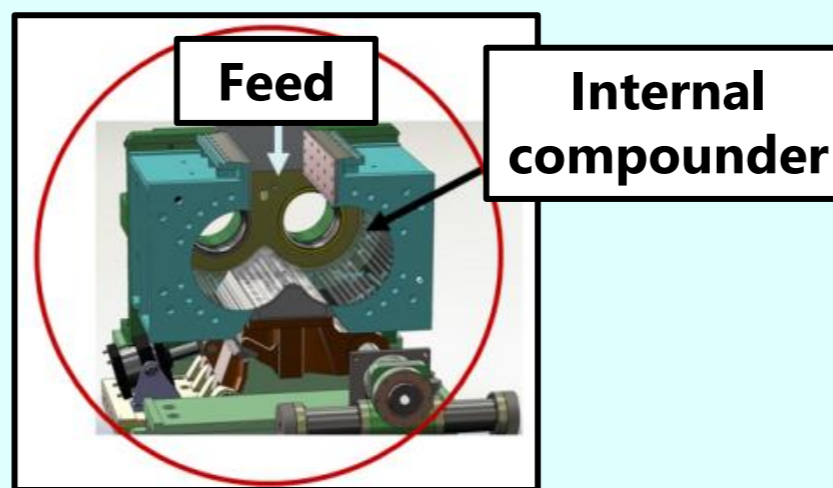

Vitrimerization

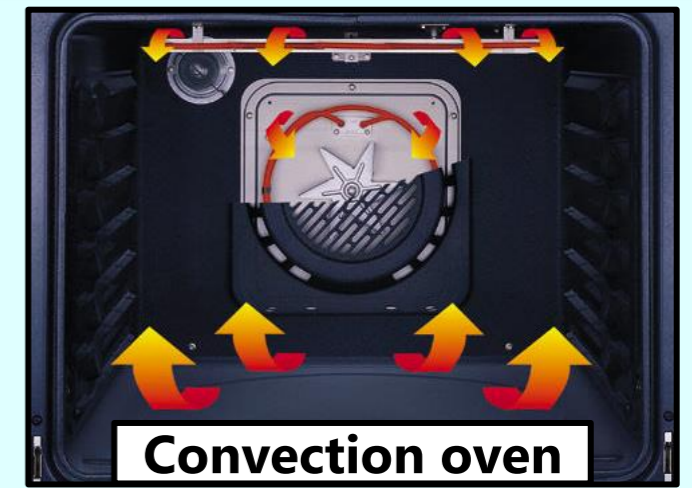

Results

Insolubility and swelling tests

- Gel fraction increased with DGEBA content and time, while swelling ratio decreased significantly.
- For PDZ_{10%} gel fraction reached up to 86.1 ± 1.5 % and swelling ratio kept low at 13.9 ± 1.9 %.

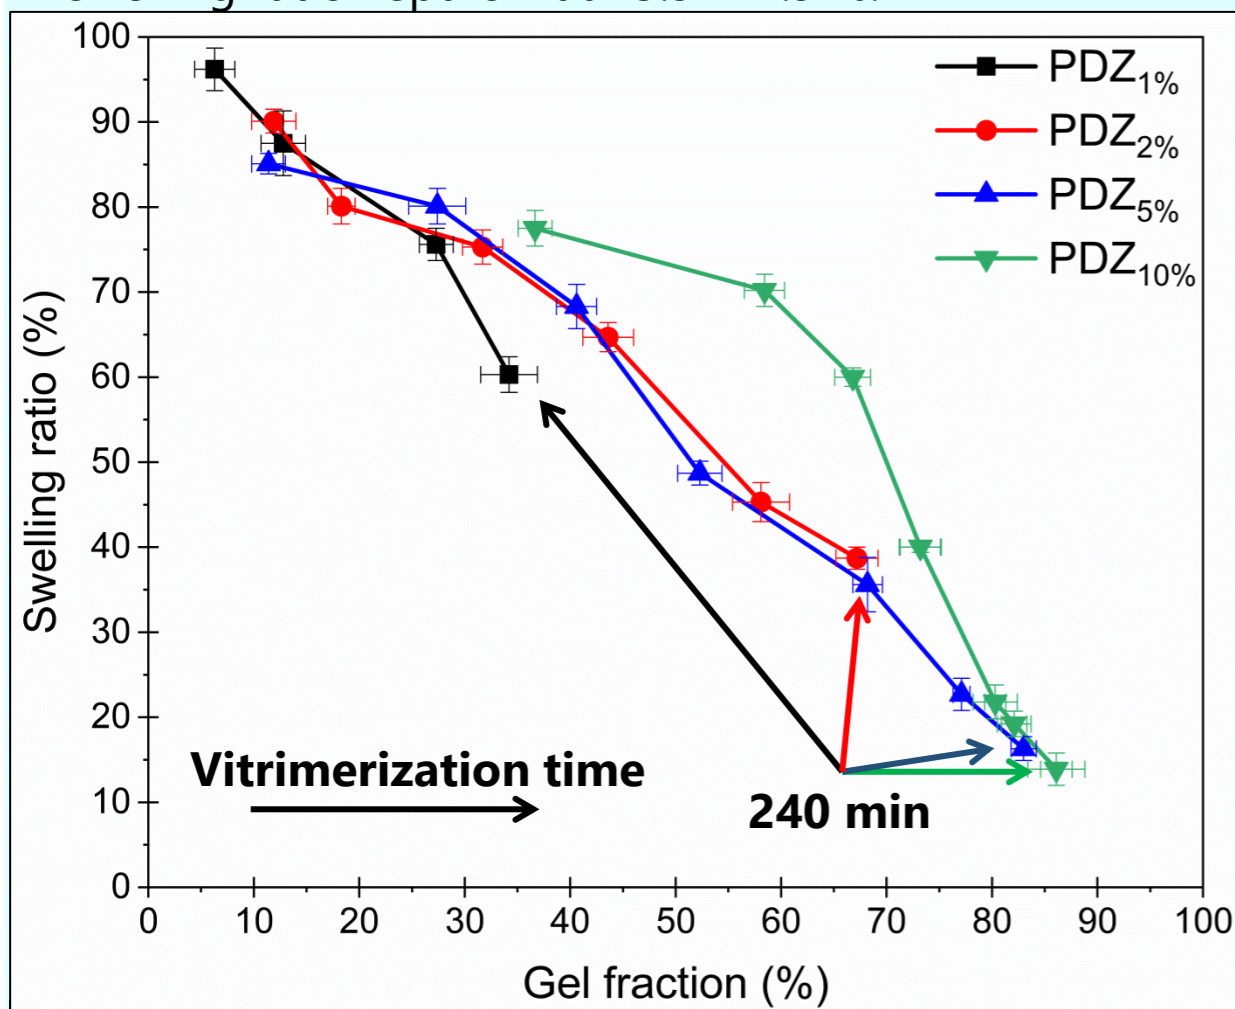


Figure 1. Effect of DGEBA content on swelling and gel fraction

Reprocessability

Final vitrimer → Cut to small pieces → Compression molding (190 °C, 30 min, 100 bar and cooling by water)

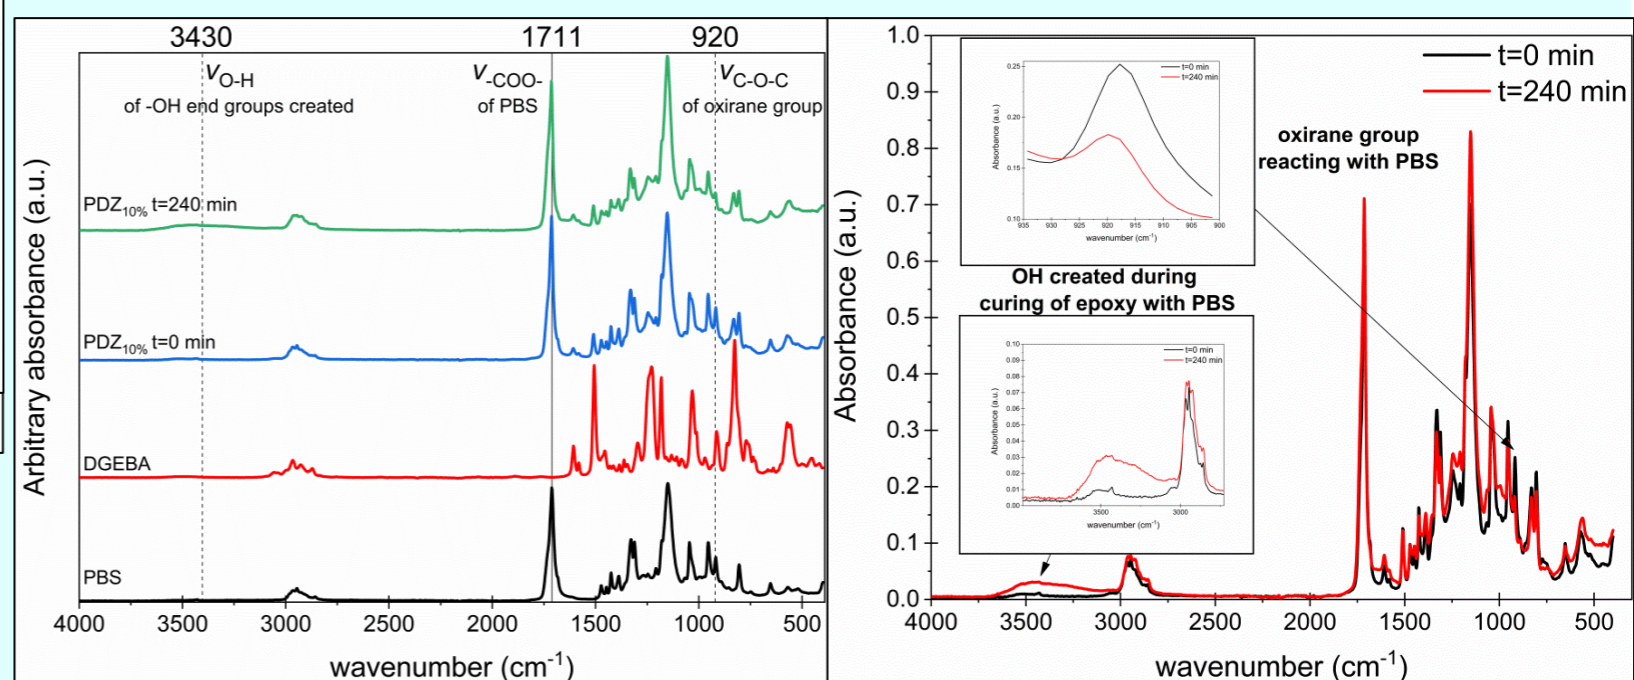
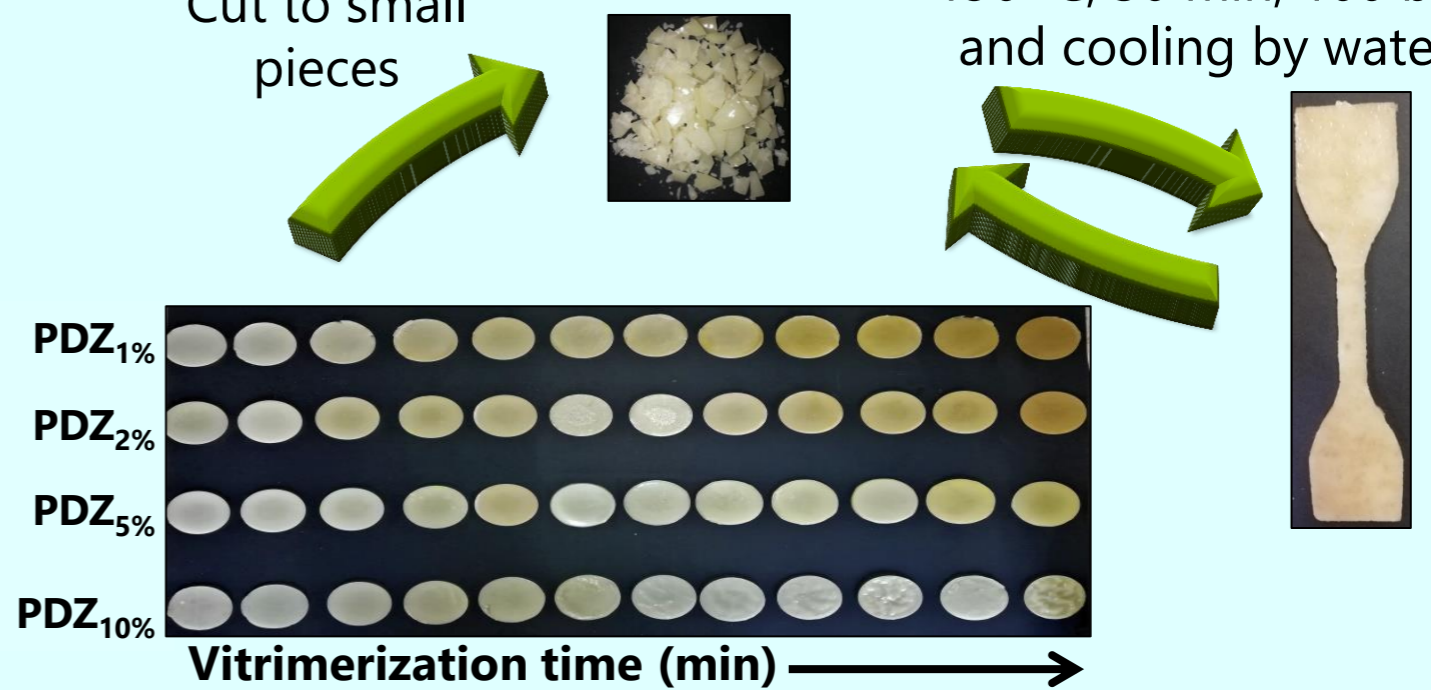


Figure 3. a) Indicative FT-IR curves of neat PBS, DGEBA and PDZ_{10%} at t=0 (initial) and t=240 min (final), b) Comparative FT-IR curves of PDZ_{10%} at t=0 and t=240 min

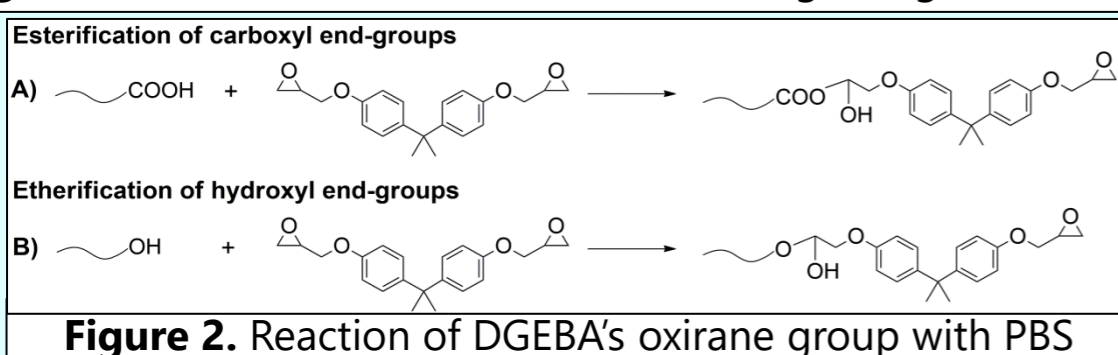


Figure 2. Reaction of DGEBA's oxirane group with PBS

References

- [1] Panagiotopoulos et al. Solid-State Polymerization as a Vitrimerization Tool Starting from Available Thermoplastics: The Effect of Reaction Temperature. *Materials* 2021, 14, 9
- [2] Hong et al. Future direction for sustainable polymers. *Trends in Chemistry* 2019;1(2):148-151.

Acknowledgements

This work was made possible by the "Basic Research Programme, NTUA, PEVE 2020 NTUA" [PEVE0050] of the National Technical University of Athens and is gratefully acknowledged.